

PR3250 is a lightweight polyester filler that provides a pore free surface and has excellent vertical stability.

It has good drying times and is easy to sand.

FULLY VOC COMPLIANT


SUITABLE SUBSTRATES



Clean all substrates with a soft cloth and Pro-MATIC Anti Silicone degreaser

- On old sanded paint work
- Steel and Polyester

APPLICATION DATA



2 - 3% with hardener paste by weight
Note: due to the low specific gravity of this product, only ½ the hardener volume usually specified is required.
Potlife: 4 minutes @ 23°C



Apply with a spatula

AIR DRYING @ 23°C




Dust Free	5 minutes
Dry to Handle	40 minutes
In Depth	2 hours

IR Drying



Short Wave 5 - 8 min

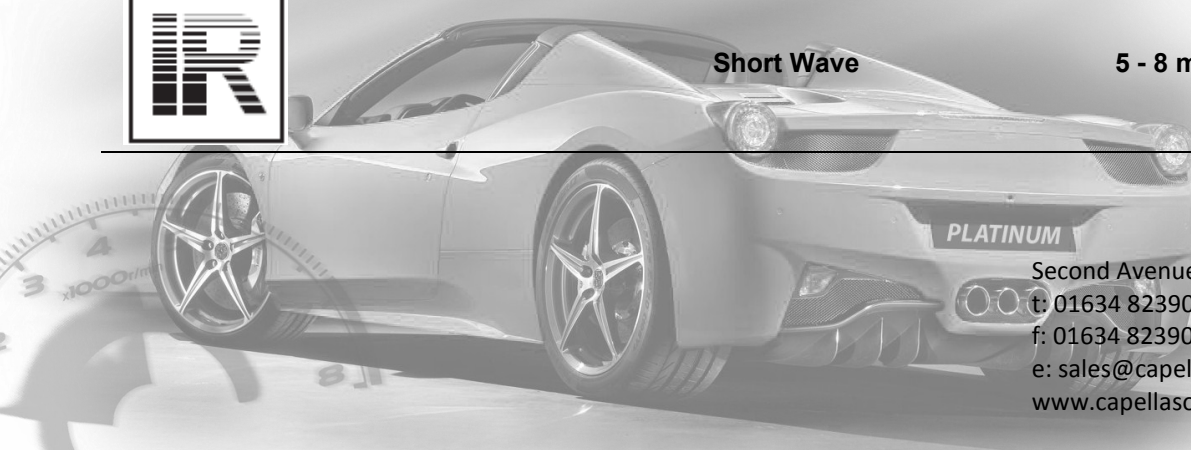

PR3250 - LIGHT WEIGHT EASY SAND POLYESTER FILLER

SANDING



P100—P180 Flat bed sander



P100—P180 Sanding by hand

Flash Point

31°C / 88°F

Specific Gravity

1.22 kg/lit

Solid Content

82% by weight (No thinner)

Theoretical Coverage

VOC (2004/42/EC)

2004/42/IIIB(e)(840)530 The EU limit value for this product category in ready for use form is max 250g/l. The VOC value of this product in ready for use form is max. 190g/l.